

APPENDIX I TO SUBPART A OF PART 401—
VESSEL DIMENSIONS

Structures are located at a number of Seaway locks which, when fully raised, overhang the lock wall at a given point, thereby limiting:


- (a) The height of a vessel above the water line measured at the vessel's side; and
- (b) The height of other structures that are located near the sides of the vessel, such as derricks, crosstrees, antennas, etc.

The following block diagram shows the limits beyond which a vessel's hull or super-

structure cannot extend *when the vessel is alongside the lock wall.*

The limits in the block diagram are based on vessels with a maximum allowable beam of 23.2 m. For vessels that have a beam width less than this and that have dimensions exceeding the limits of the block diagram (measured with the vessel alongside the lock wall), a special permission to transit must be obtained. (Accurate measurements may be required before such permission is granted).

Caution: Masters must take into account the ballast draft of the vessel when verifying the maximum permissible dimensions.

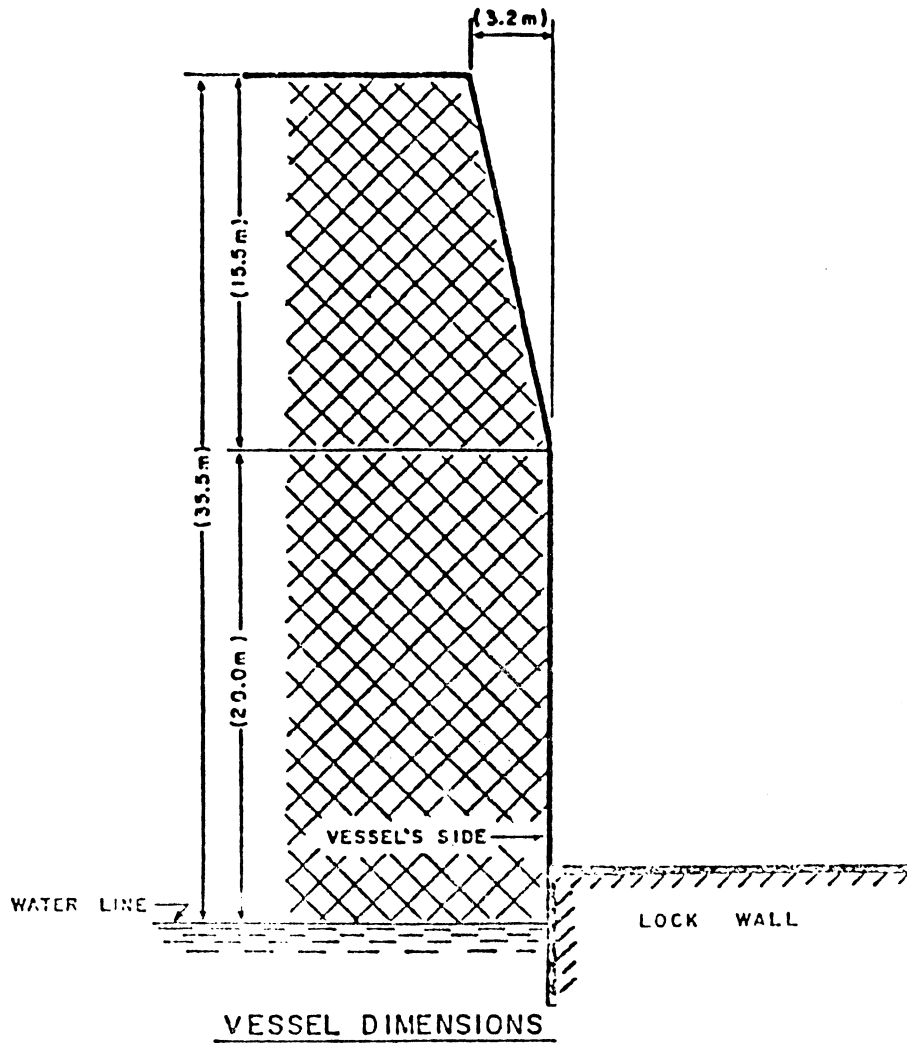

Block Diagram

N.B. Not to scale

(68 Stat. 93-96, 33 U.S.C. 981-990, as amended and secs. 4, 5, 6, 7, 8, 12 and 13 of sec. 2 of Pub. L. 95-474, 92 Stat. 1471)

[45 FR 52381, Aug. 7, 1980, as amended at 49 FR 30936, Aug. 2, 1984; 61 FR 19552, May 2, 1996]

**Subpart B—Penalties—Violations
of Seaway Regulations**

AUTHORITY: 33 U.S.C. 981-990, 1231 and 1232;
and 49 CFR 1.52.

§ 401.101 Criminal penalty.

(a) A person who willfully and knowingly violates a regulation shall be fined not more than \$50,000 for each violation or imprisoned for not more